



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/24/13	D	UPDATED SPECIFICATION FOR SHOCK TEST UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
04/22/16	E	UPDATED HOLDER MATERIAL	T.B.	B.S.	
12/02/16	F	MATERIAL COLOR CHANGED FROM BLACK TO OFF WHITE	T.B.	B.S.	

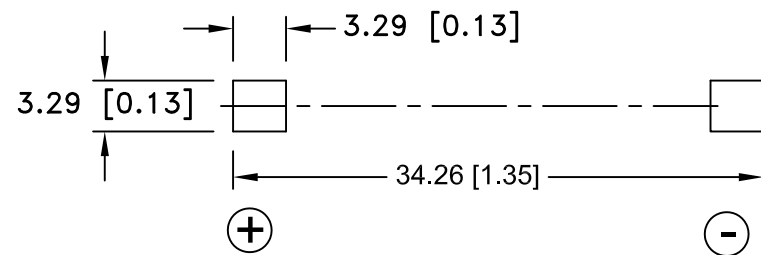

SPECIFICATIONS:

- * Holder material- LCP, 30% Glass Filled, UL94V-0, Color: Off White
Temperature range: -40°C to +240°C,
- * Contacts : Stainless Steel 301, spring temper, Nickel Plated,
- * Vibration test: 10-50-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 150g.
6 ms 3 shock pulses each direction per axis,
total of 18 pulses
- * Result: no evidence of physical damage
- * Drop Test: Mounted on board and dropped 5 times from 1m high to concrete floor
- * Result: No dislodgement of the cell, No damage to the holders

* ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title CR2032 BATTERY HOLDER, SURFACE MOUNT		
Angular ± 3°	Date 12/02/16	Drawing Number BC2032-F1	