



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/24/17	A	UPDATED SPECIFICATION	T.B.	B.S.	
04/06/18	B	UPDATED TITLE	T.B.	B.S.	
04/12/19	C	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

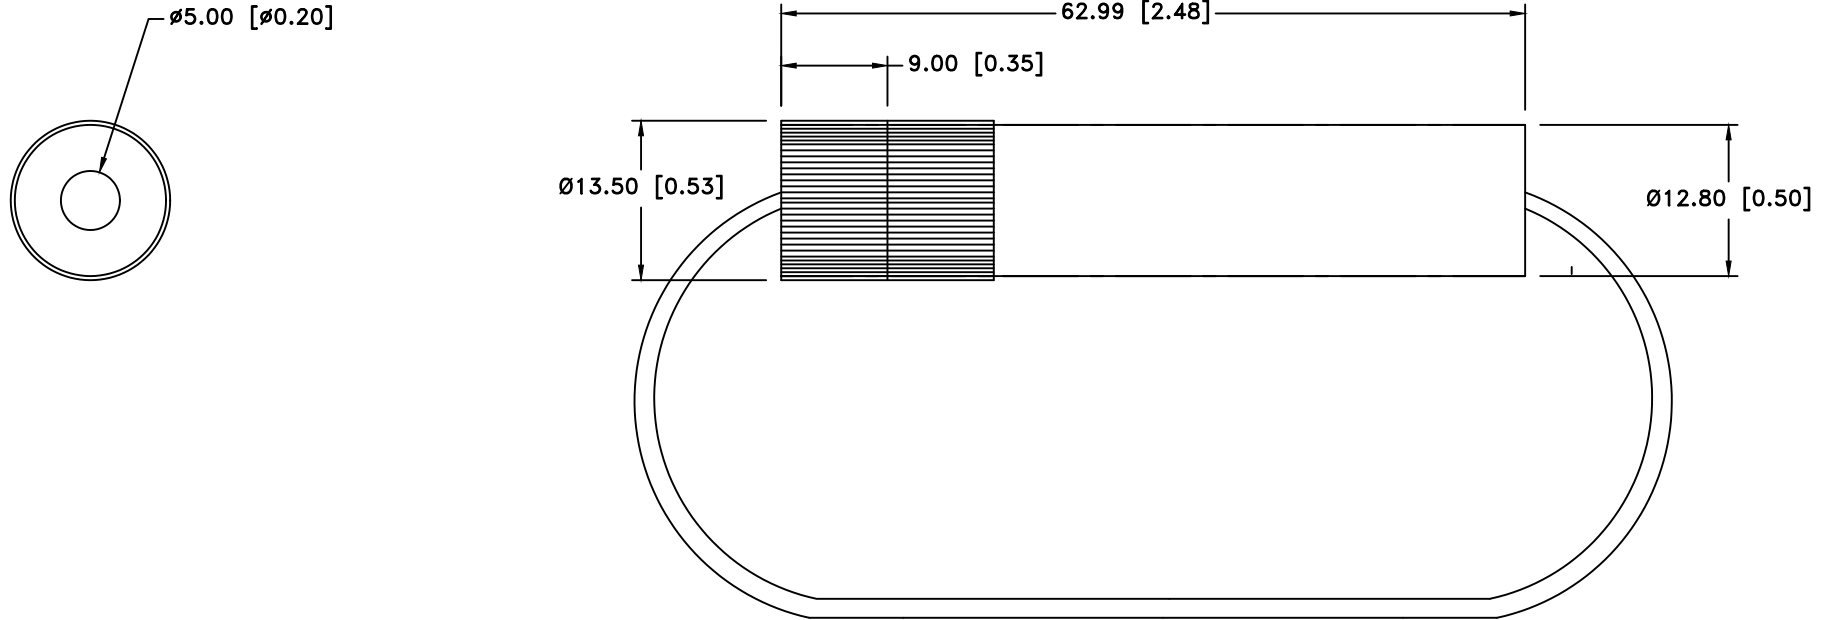

NOTES:

- MATERIAL:
HOUSING : BAKELITE BODY ,UL94V-0, FILE NO. E59481
- LEAD WIRE IN LOOP: RED WIRE, 12 AWG, UL 1015, 600V, 105°C, FLAME RATED VW-1, UL FILE NO. E108485 OR ENGINEERING APPROVED EQUIVALENT
- RATED CURRENT: 30A
- ACCEPTS AGC/JMC FUSES
- INSULATION RESISTANCE AT 500V DC: 100M Ω MIN
- CONTACT RESISTANCE: 5m Ω AT 1A DC
- DIELECTRIC STRENGTH FOR 60 SECONDS: AC 2000V MIN
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal $\pm .5$ (.020)	Title INLINE FUSE HOLDER ABC/ATE/JMC/JTB FUSES		
Fractional $\pm .8$ (.030)	Date 04/12/19	Drawing Number BF302	
Angular $\pm 3^\circ$			