
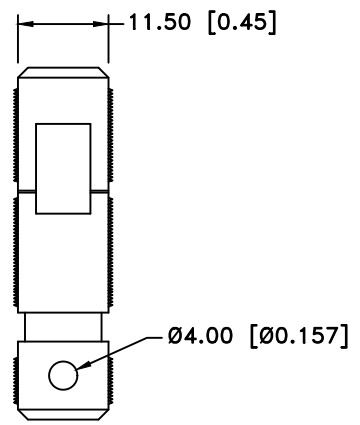



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/19	A	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

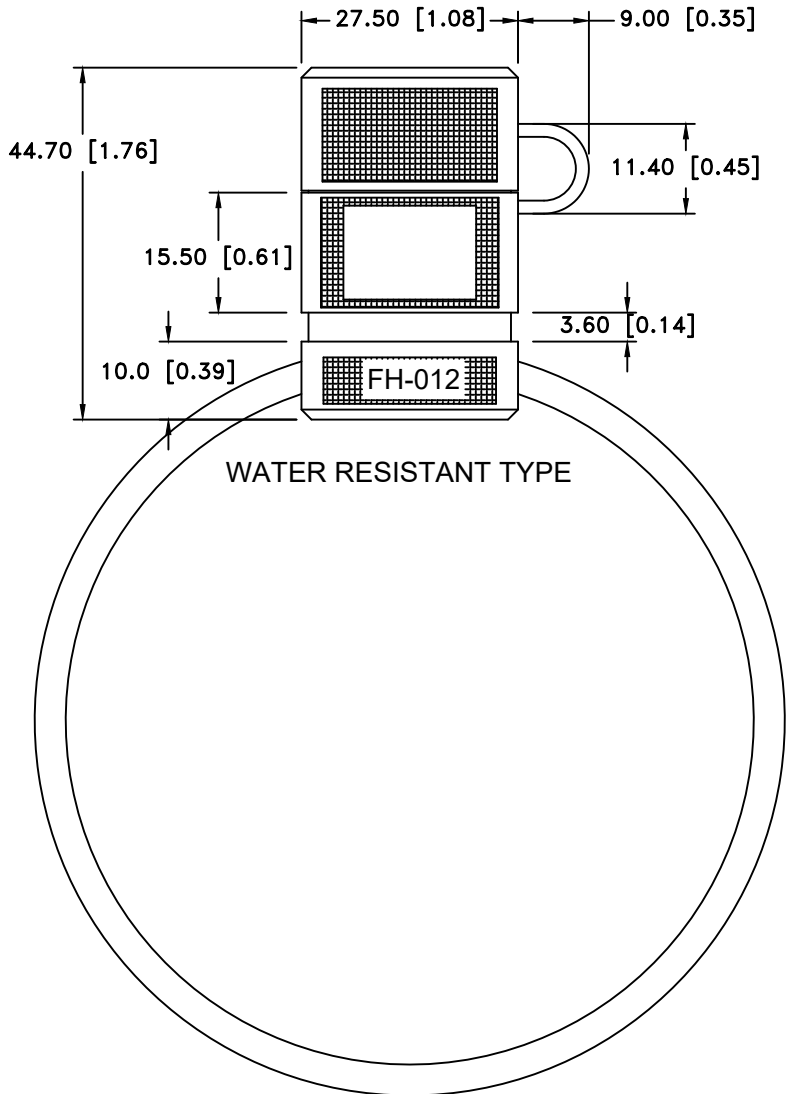

NOTES:

- MATERIAL:**
HOUSING : PVC, UL 94V-0, FLEX 60GPVC, UL FILE NO. E174939
 - LEAD WIRE IN LOOP:** RED WIRE, 12AWG, UL-1015, 600V, 105°C, FLAME RATING VW-1, UL FILE NO. E250011, OR ENGINEERING APPROVED EQUIVALENT
 - RATED CURRENT:** 30A
 - ACCEPTS ATP/ATC/ATO FUSES**
 - INSULATION RESISTANCE AT 500V DC:** 100M Ω MIN
 - CONTACT RESISTANCE:** 5m Ω AT 1A DC
 - DIELECTRIC STRENGTH FOR 60 SECONDS:** AC 1000V MIN
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title INLINE FUSE HOLDER		
Fractional ± .8 (.030)	Date 04/12/19	Drawing Number BF351	
Angular ± 3°			