

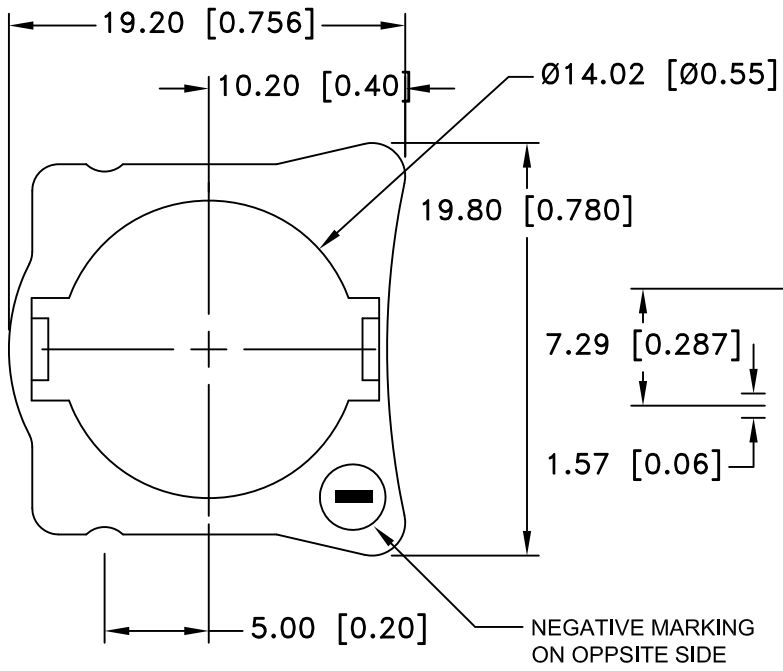
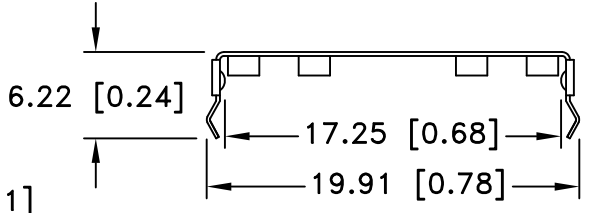
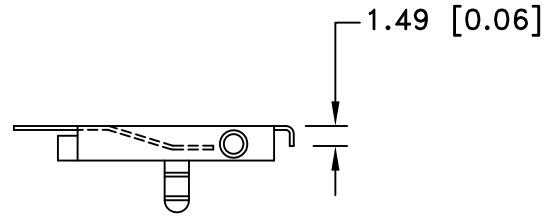
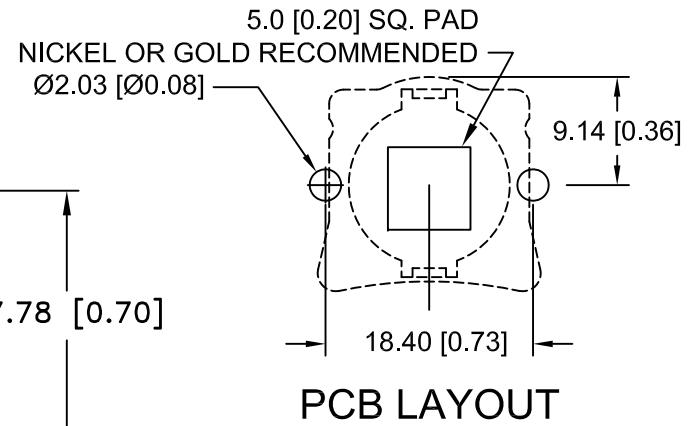


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/11/15	E	CHANGED MICRO SEC. TO MILLISECONDS	T.B.	B.S.	
03/24/17	F	REDRAWN INSULATOR TOP VIEW	T.B.	B.S.	

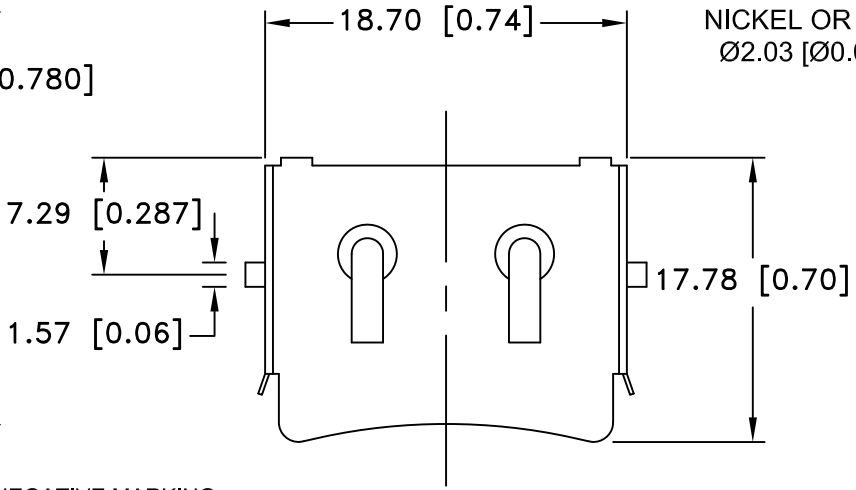


INSULATOR

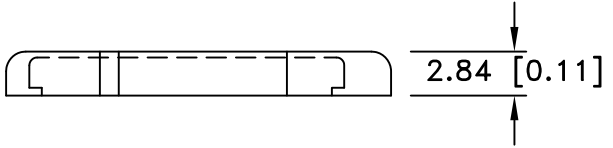

SPECIFICATIONS:

- * Holder material- Polypropylene, AV161 PP, Off White
- * UL Flammability Rating: UL 94-HB File No. E108370
- * Contacts : Phosphor Bronze C5191, Nickel Plated
- * Vibration test: 10-50-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 microseconds
- * Shock test: half sine wave acceleration 150g.
6 milliseconds 3 shock pulses each direction per axis,
total of 18 pulses
- * Result: no evidence of physical damage
- * ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		Approved By T.B.	
decimal ±.5 (.020)	Title CR1620 PC PINS BATTERY RETAINER WITH INSULATOR		
Fractional ± .8 (.030)	Date	Drawing Number	
Angular ± 3°	03/24/17	BHX1-1620-PC	