
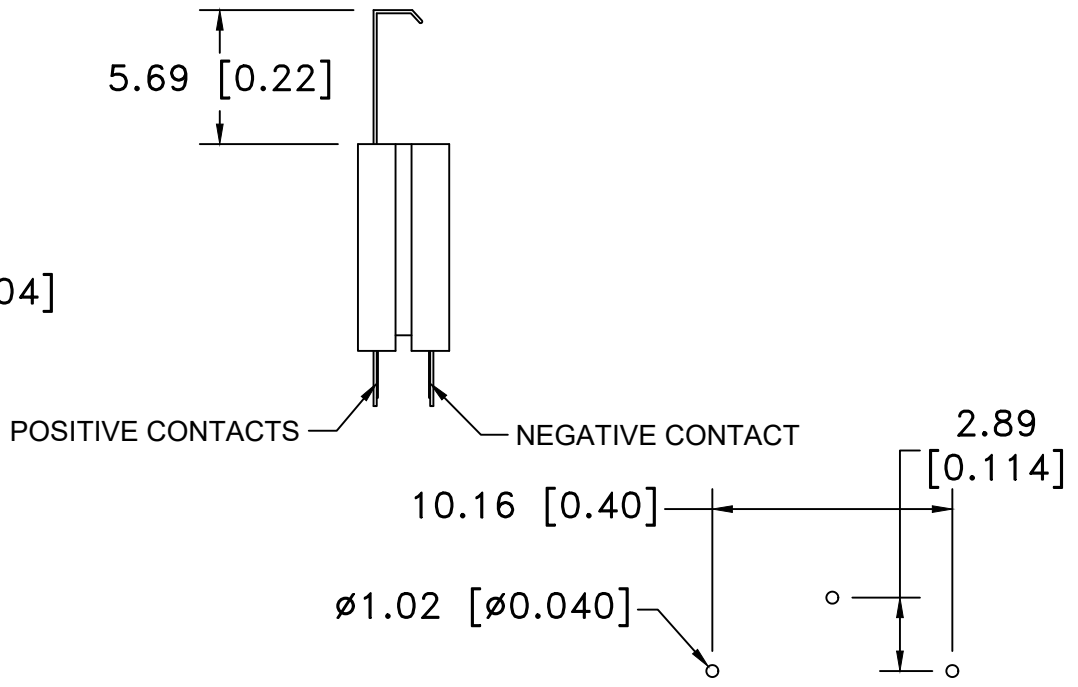
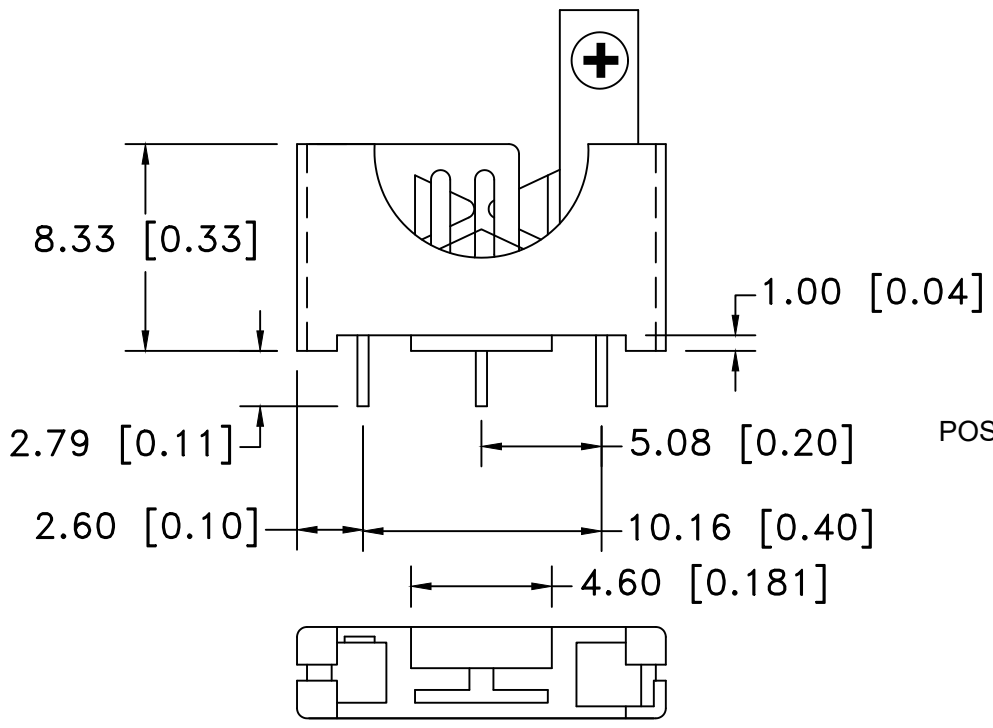



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/01/17	J	UPDATED SIDE VIEW	T.B.	B.S.	
10/31/19	K	ADDED WEIGHT OF THE PART	T.B.	B.S.	

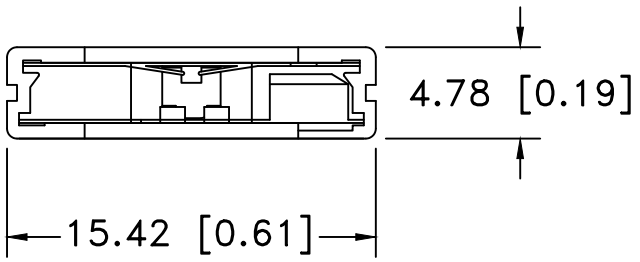

PCB LAYOUT

NOTES:
MATERIAL: GLASS FILLED NYLON 66, UL94V-0
COLOR BLACK, UL FILE NO. E245249
CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
ELECTRICAL :
VOLTAGE: 250V AC
CONTACT RESISTANCE: 30mΩ MAX
INSULATION RESISTANCE: 1000mΩ AT DC 500V
DIELECTRIC STRENGTH: AC 1000V PER MINUTE
TEMPERATURE RANGE: -40°C TO +200°C
APPROXIMATE WEIGHT: 0.68g
ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title BR/CR/DL 1225 VERTICAL BATTERY HOLDER, 3 PINS		
Angular ± 3°	Date 10/31/19	Drawing Number BS-1225-PC	