
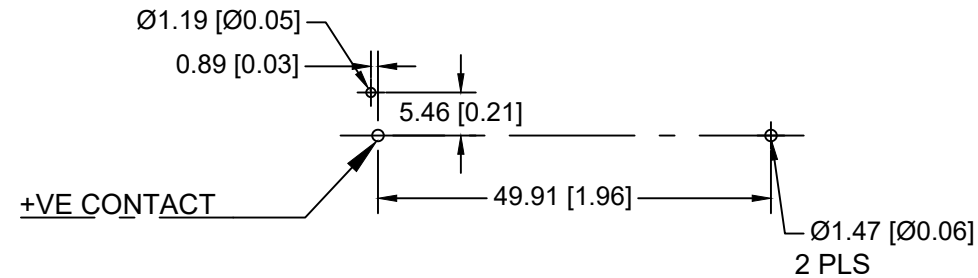
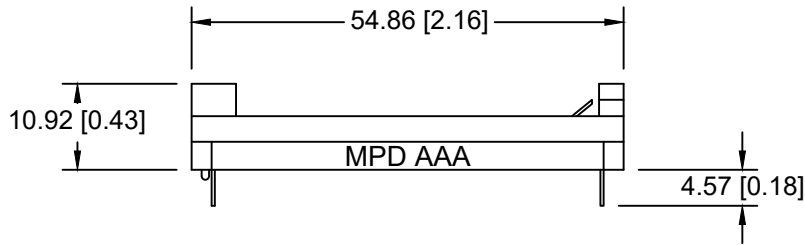


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|----------------------------------|------|------|-----|
| 02/27/19 | A | Updated note to "ROHS COMPLIANT" | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |



PCB LAYOUT

SPECIFICATION:

HOUSING : BLACK POLYPROPYLENE


FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C

CONTACTS: NICKEL PLATED STAINLESS STEEL, TYPE 301, SPRING TEMPER

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS COMPLIANT

| | | | |
|--------------------------------|---|----------------------------|-----------------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| | decimal ±.5 (.020) | Scale | Drawn By B.S. Approved By T.B. |
| Fractional ± .8 (.030) | Title ONE "AAA" CELL SPRINGLESS HOLDER | | |
| Angular ± 3° | Date 02/27/19 | Drawing Number BA1AAAPC | |