



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/24/07	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/05/07	B	UPDATED TOLERANCE AND TITLE BLOCK	T.B.	B.S.	
5/19/17	C	DIM. 8.0 WAS 9.40 DIM. 8.10 WAS 9.40 DIM. 8.30 WAS 9.40	T.B.	B.S.	

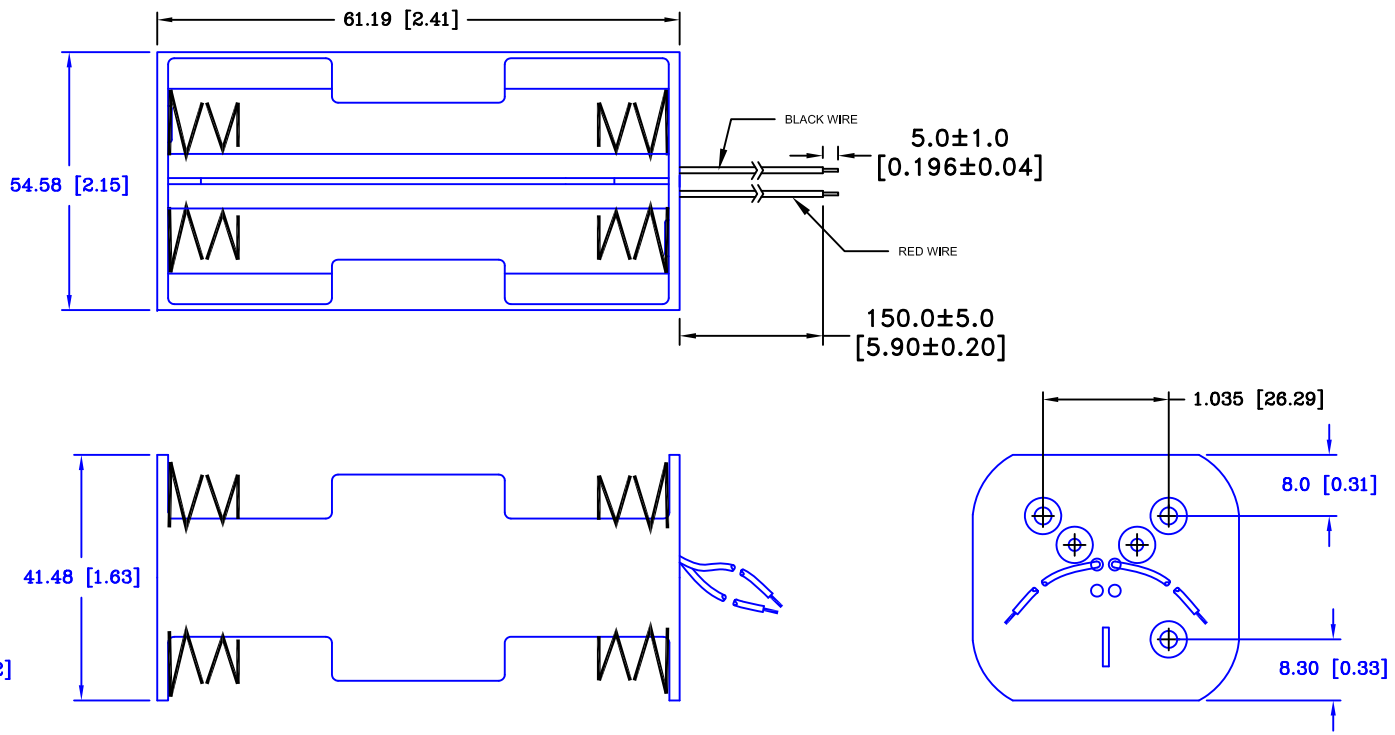

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale 1=1	Drawn By T.S.
			Approved By T.B.
decimal ±.020 (.5)	Title FOUR "C" CELL HOLDER WITH 6" WIRE LEADS		
Fractional ± .030 (.8)		Date 5/19/17	Drawing Number BH22CW
Angular ± 3°			