





Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/08/13	Α	Updated to ROHS 2 compliant	T.B.	B.S.	
05/19/17	В	Dim. 1.84 was 3.18	T.B.	B.S.	



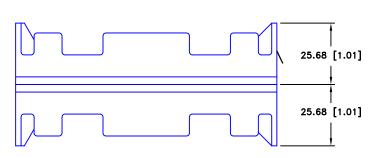





Specifications:

1 material

Housing: black polypropylene
Flammability rating -ul94-hb, ul file no. e216959
Temperature range: -10°c to +100°c
Solder Lugs: Steel, Nickel Plated

Rivets: brass, nickle pltd. Springs - Nickel Plated Spring Steel

Contact Resistance: Under 50mΩ for +/- contacts per

EIA-540J000

ROHS 2 COMPLIANT

Tolerance	Memory Protection Devices, Inc							
(Except as noted)	200 Broad Hollow Road, Farmingdale, New York 11735							
decimal			Scale	Drawn By T.S.				
±.5 (.020)			1=1	Approved By T.B.				
Fractional	Title	"a" and Ha						
± .8 (.030)	EIGHT	C CELL HO	LDER WI	TH SOLDER LUGS				
Angular	Date	Drawing Nu	mber					
± 3°	5/19/17	BH28CL						