



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/07/19	D	UPDATED ALL DIMENSIONS	T.B.	B.S.	

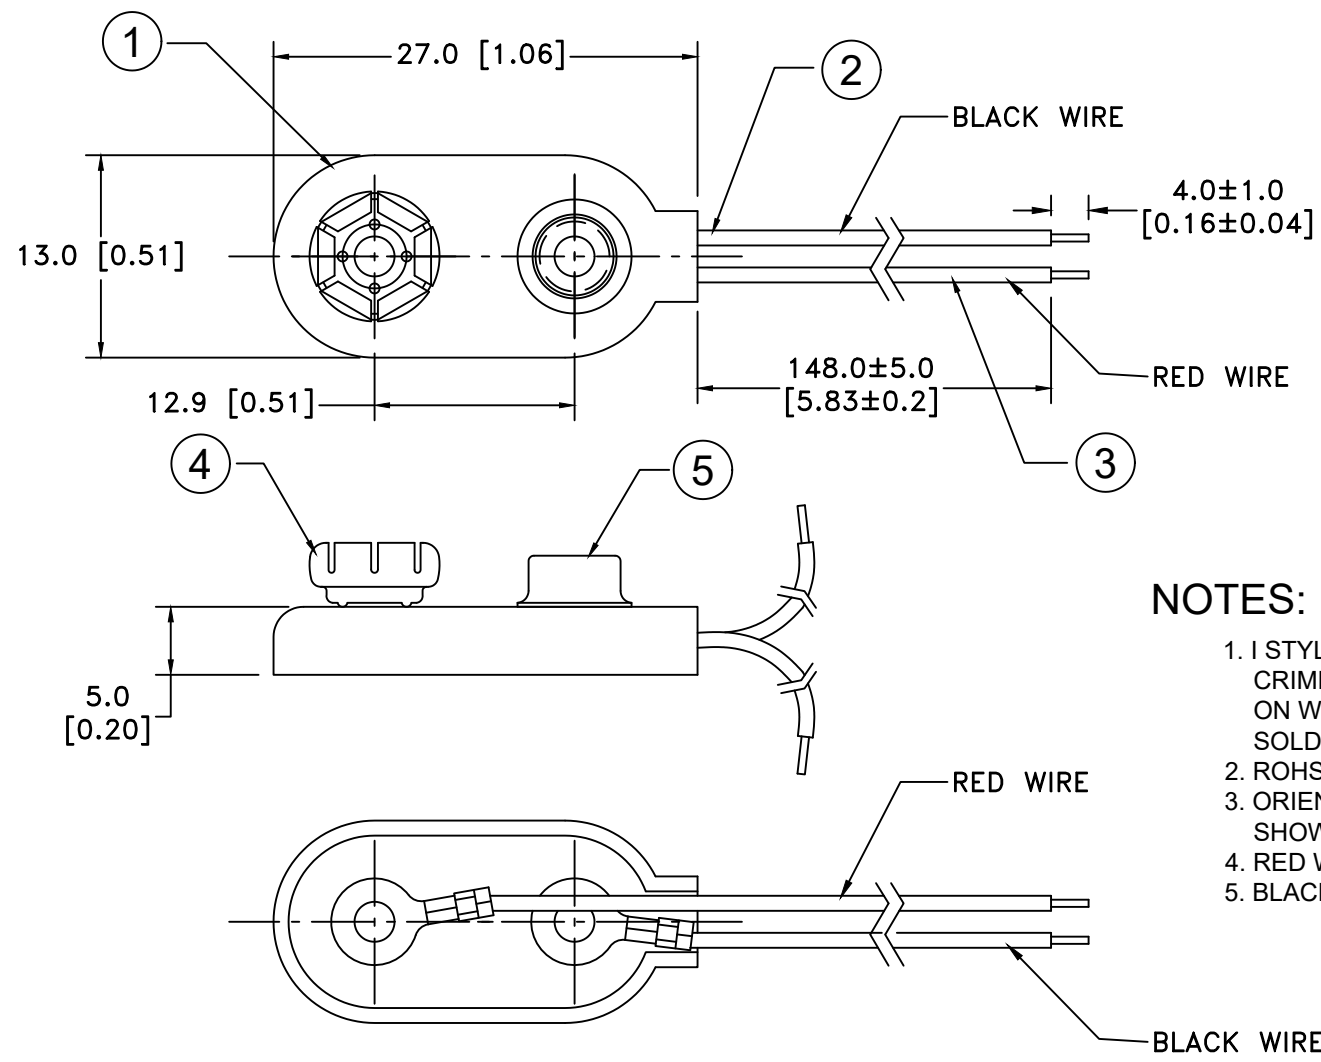

NOTES:

1. I STYLE 2 PCS. MOLDED CASE CONSTRUCTION WITH CRIMP CONNECTIONS. CRIMP ON WIRE INSULATION AND ON WIRE PROVIDES STRAIN RELIEF THAT STANDARD SOLDERED SNAPS DO NOT HAVE.
2. ROHS COMPLIANT
3. ORIENTATION OF SNAPS AND WIRES VARIES AND IS SHOWN FOR REFERENCE ONLY.
4. RED WIRE TO POSITIVE CONTACT.
5. BLACK WIRE TO NEGATIVE CONTACT.

NO.	PART NAME	MATERIAL	QTY.
1	MOLDED CASE	2 PCS., POLYETHYLENE, WHITE WITH BLUE INSERT	1
2	BLACK WIRE(-)	24 AWG, UL-1007, CSA TR-64, 300V, 80°C	1
3	RED WIRE (+)	24 AWG, UL-1007, CSA TR-64, 300V, 80°C	1
4	FEMALE SNAP	BRASS NICKLE PLATED	1
5	MALE SNAP	BRASS NICKLE PLATED	1

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
	decimal	Scale
±.5 (.020)		Drawn By B.S.
Fractional	Title	
± .8 (.030)	9 VOLT BATTERY SNAP-I STYLE-6" WIRE LEADS, MOLDED CASE	
Angular	Date	Drawing Number
± 3°	6/07/19	BS6I-MC